


COMMONWEALTH DC BRUSHLESS FAN

FP-108J/DC


50x50x10mm

DESIGN FEATURES


- ***BEARING SYSTEM:** SLEEVE BEARING & BALL BEARING
- ***IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***HOUSING:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***MOTOR:** BRUSHLESS DC
- ***CONNECTING:** WIRE LEADS
- ***SPEED:** S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- ***AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL**
- ***AVAILABLE RD TYPE FOR ROTOR LOCKED ALARM SIGNAL**

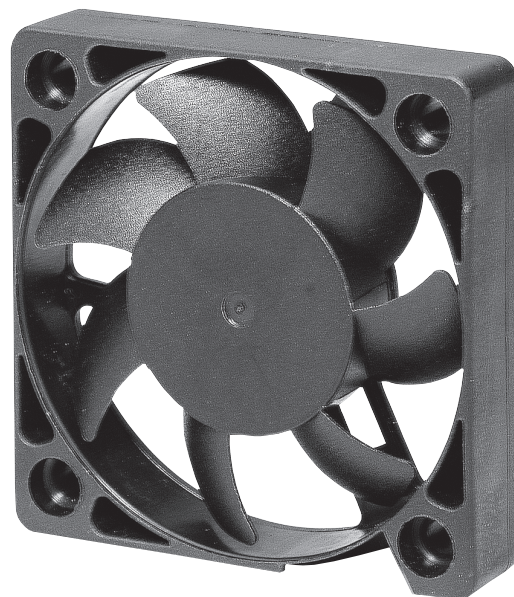

DIMENSIONS:MM

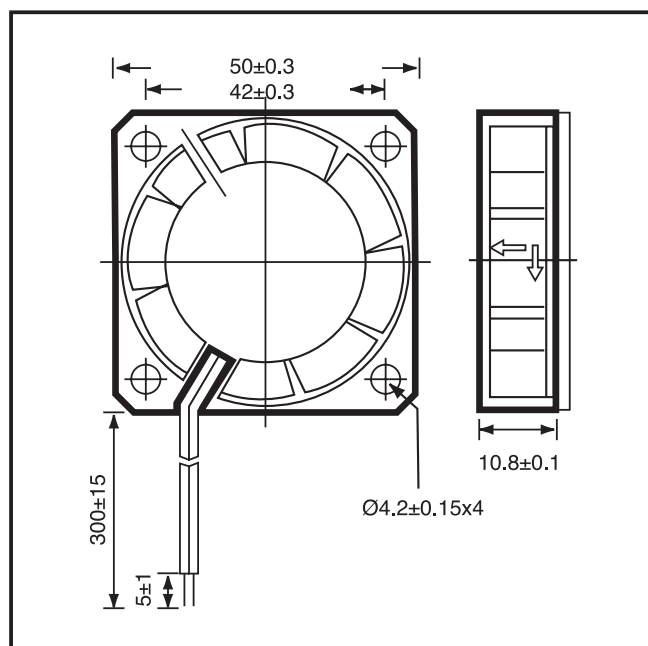

PERFORMANCE

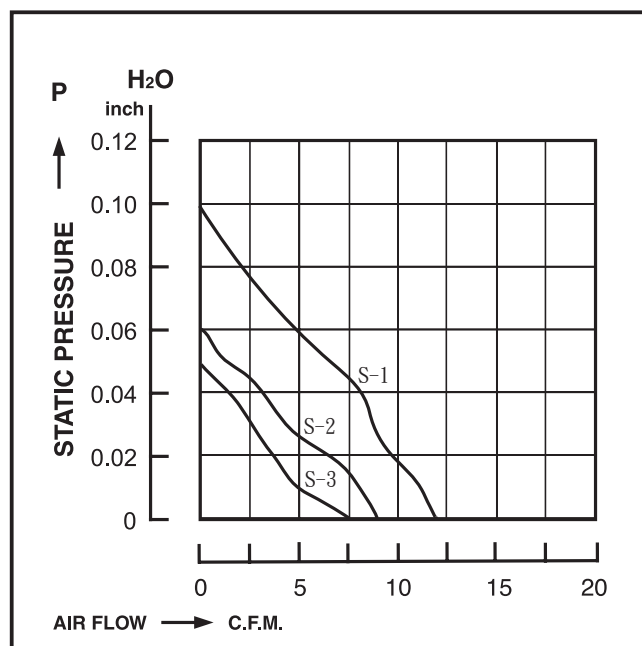

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108J/DC (S-1)	12 24	12.30 12.30	0.35 0.35	0.16 0.09	1.92 2.16	5500 5500	0.10 0.10	32 32
FP-108J/DC (S-2)	12	8.80	0.25	0.10	1.20	4000	0.06	28
FP-108J/DC (S-3)	12	7.50	0.21	0.07	0.84	3500	0.05	20