

COMMONWEALTH DC BRUSHLESS FAN

FP-108B/DC


92x92x25.4mm

DESIGN FEATURES


- ***BEARING SYSTEM:** SLEEVE BEARING & BALL BEARING
- ***IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***HOUSING:** PLASTIC WITH FIBER GLASS FILLED UL 94V-0
- ***MOTOR:** BRUSHLESS DC
- ***CONNECTING:** WIRE LEADS
- ***SPEED:** S-1 HIGH SPEED TYPE
S-2 MEDIUM SPEED TYPE
S-3 LOW SPEED TYPE
- ***AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL**
- ***AVAILABLE RD TYPE FOR ROTOR LOCKED ALARM SIGNAL**



DIMENSIONS:MM

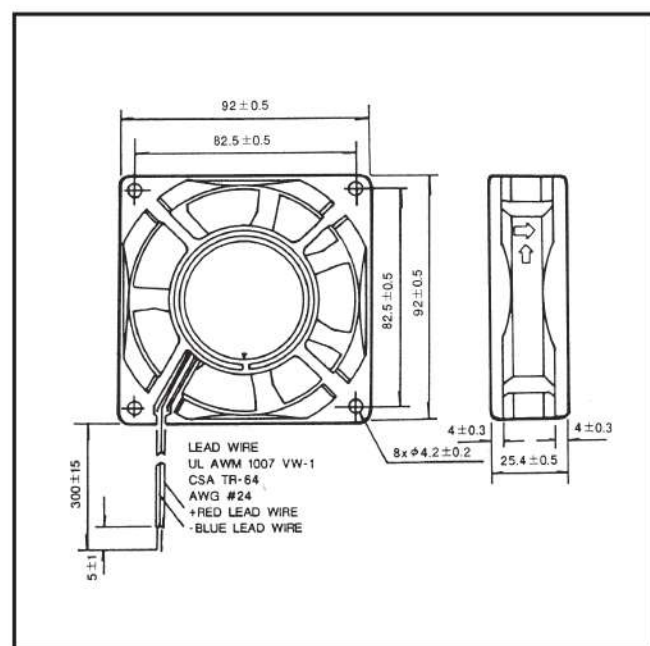

PERFORMANCE

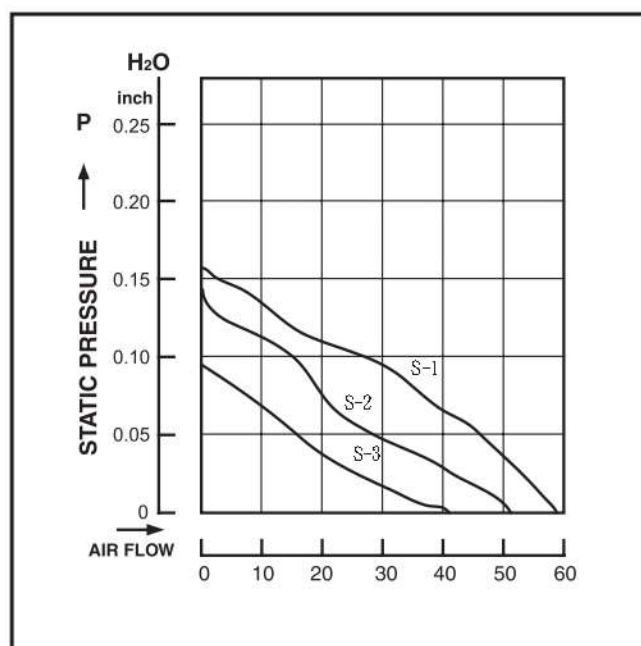

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108B/DC (S-1)	12	59.0	1.67	0.32	3.84	3000	0.16	36
	24	59.0	1.67	0.18	4.32	3000	0.16	36
FP-108B/DC (S-2)	12	50.5	1.43	0.20	2.40	2500	0.14	34
	24	50.5	1.43	0.14	3.36	2500	0.14	34
FP-108B/DC (S-3)	12	41.5	1.18	0.16	1.92	2200	0.09	26
	24	41.5	1.18	0.10	2.40	2200	0.09	26