

COMMONWEALTH DC BRUSHLESS FAN

FP-108F/DC


60x60x25.4mm ULTRA

DESIGN FEATURES


- ***BEARING SYSTEM:** BALL BEARING & SLEEVE BEARING
- ***IMPELLER:** PLASTIC WITH FIBER GLASS FILLED UL 94-0
- ***HOUSING:** PLASTIC WITH FIBER GLASS FILLED UL 94-0
- ***MOTOR:** BRUSHLESS DC
- ***CONNECTING:** WIRE LEADS
- ***SPEED:** U-1 HIGH SPEED TYPE
U-2 MEDIUM SPEED TYPE
U-3 LOW SPEED TYPE
- ***AVAILABLE FG TYPE FOR SPEED SENSOR SIGNAL**
- ***AVAILABLE RD TYPE FOR ROTOR LOCKED ALARM SIGNAL**



DIMENSIONS:MM

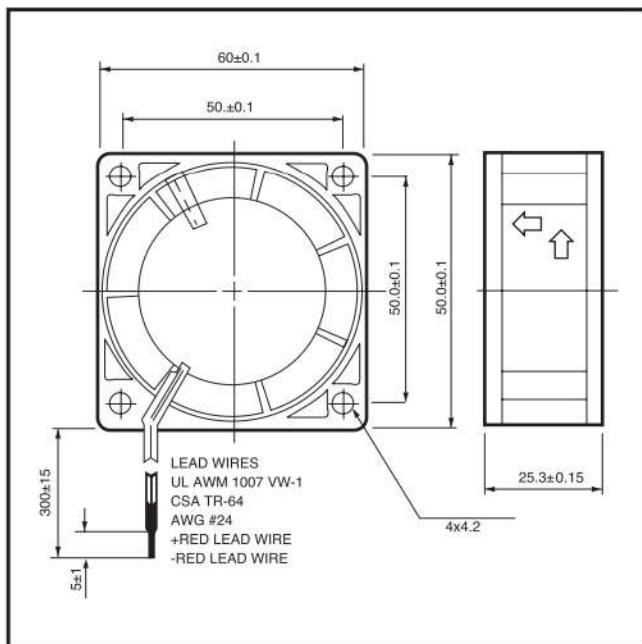

PERFORMANCE

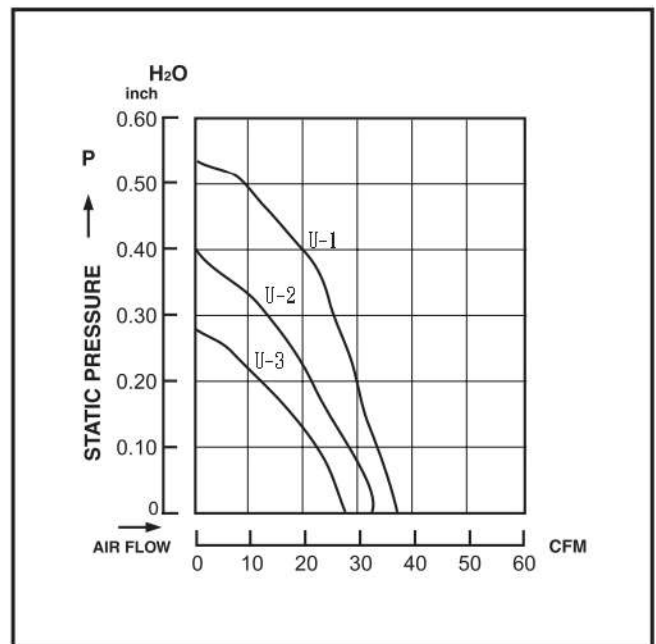

SPECIFICATIONS

Specifications are subject to change without notice

MODEL NO.	VOLTAGE (VDC)	AIR (CFM)	VOLUME (M ³ /MIN)	CURRENT (A)	POWER (W)	SPEED (RPM)	STATIC PRESSURE (INCH-H ₂ O)	NOISE (dBA)
FP-108F/DC (U-1)	12	38.5	1.10	0.39	4.68	7000	0.53	46
	24	38.5	1.10	0.22	5.28	7000	0.53	46
FP-108F/DC (U-2)	12	33.0	0.93	0.34	4.08	6000	0.40	42
	24	33.0	0.93	0.18	4.32	6000	0.40	42
FP-108F/DC (U-3)	12	28.0	0.80	0.23	2.76	5000	0.29	37
	24	28.0	0.80	0.13	3.12	5000	0.29	37